

iGLO LED Flat Canopy Series - 150W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- cULus, DLC Certificate
- PHILIPS Chip, high CRI
- Mean Well IP65 driver
- Input Voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



Applications

Gas Stations, Service Stations,
Underground Parking Lot, Warehouse,
Garage, Work Floor & Factories, etc.

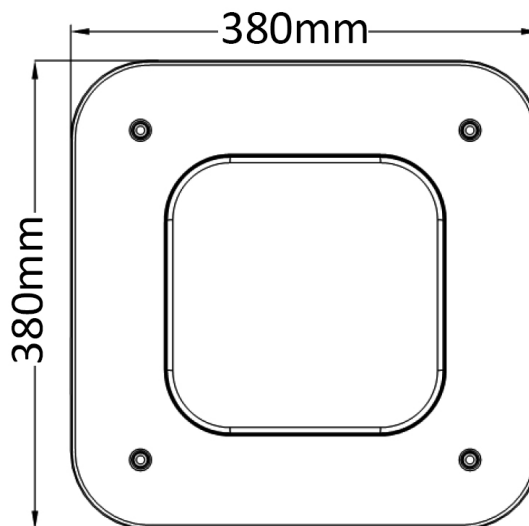

PRODUCT SPECIFICATIONS

iGLO LED Canopy Series:	GL150WMCANP131SN4000KUDX GL150WMCANP131SN5000KUDX GL150WMCANP131SN5700KUDX	GL150WMCANP231SN4000KUDX GL150WMCANP231SN5000KUDX GL150WMCANP231SN5700KUDX
Mounting Types:	1: Ceiling Mounting 2: Threaded Rod Mounting	
Wattage:	150W	
Lumens:	16142 lm - 16877 lm	16435-16877 lm
CCT:	4000K/5000K/5700K	
Input Voltage:	AC100-277V, 50/60 Hz	
Power Factor:	≥0.9	
Efficacy:	107-110 lm/W	
CRI:	>70	
Dimension:	380*380*78mm	
Viewing Angle:	110°	
Operating Temperature:	-20°C to 45°C	
Weight:	13.88 lb	
Application:	Outdoor	
Housing:	Aluminum	
Housing color:	White	
Waterproof Rating:	IP65	
Certificates:	UL, DLC	
Warranty:	5 Years	

Box Size	Qty/Carton	Gross Weight	Net Weight
425*420*120mm	1	7.2 kg/CTN	6.3 kg/PCS

PHOTOMETRIC DATA

