

iGLO LED Slim Canopy Series - 180W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- UL Certificate
- High CRI
- Mean Well IP65 driver
- Input Voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



Applications


Gas Stations, Service Stations,
Underground Parking Lot, Warehouse,
Garage, Work Floor & Factories, etc.

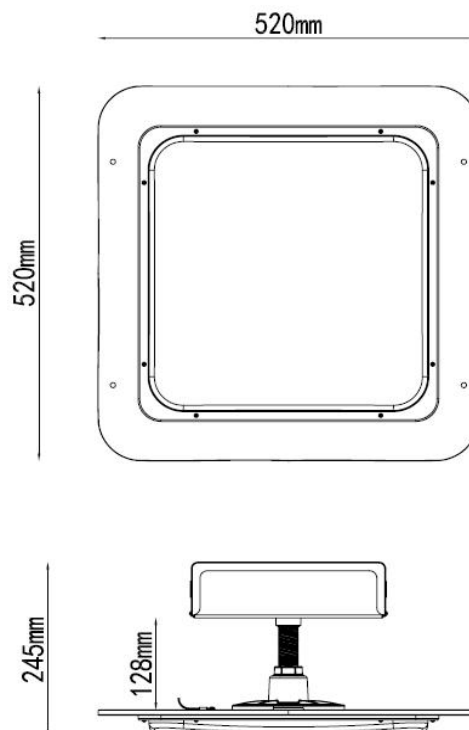


PRODUCT SPECIFICATIONS

iGLO LED Canopy Series:	GL180WLCANPY1SN4000KUDX GL180WLCANPY1SN4500KUDX GL180WLCANPY1SN5000KUDX GL180WLCANPY1SN5700KUDX
Wattage:	180W
Lumens:	27000-30000 LM
CCT:	4000K/4500K/5000K/5700K
Input Voltage:	100-277VAC, 50-60 Hz
Power Factor:	>0.9
Lens Type:	Frosted
CRI:	>80
Dimension:	520*520*242mm
Viewing Angle:	110°
Operating Temperature:	-20°C to 45°C
Application:	Outdoor/Indoor
Housing:	Aluminum
Waterproof Rating:	IP65
Certification:	UL
Warranty:	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

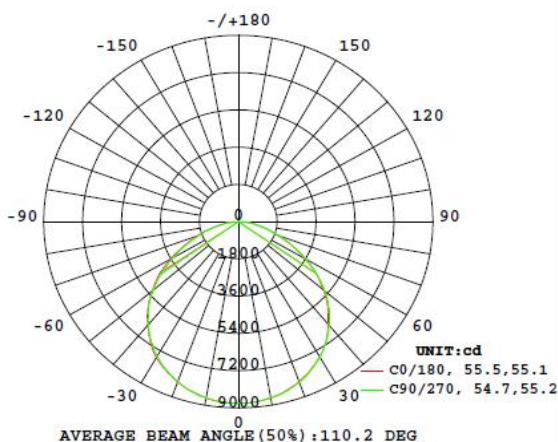

Flux out: 17908 lm

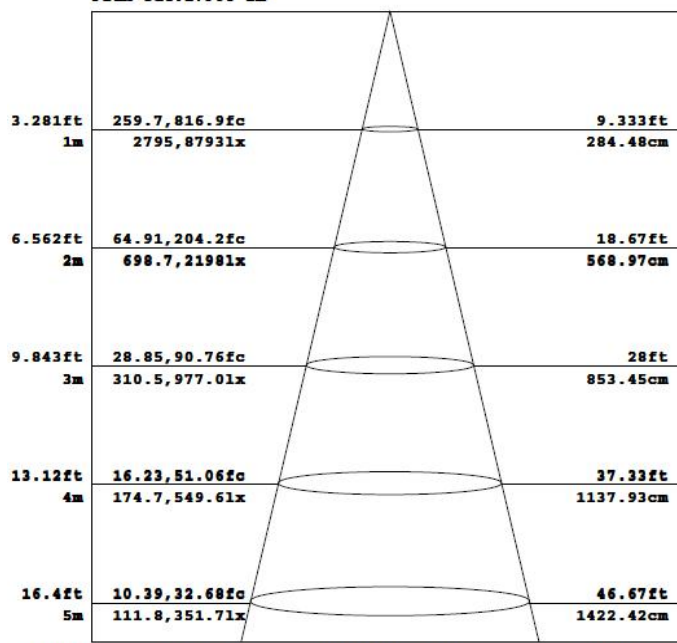

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.