

iGLO LED Double Ring Flush Mount - 11IN, 18W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET



Features

- Kelvin Changing
- ETL, cULus, RoHS certificates
- Input voltage 120VAC
- Finish Steel Double Rings
- No UV or IR in the beam
- Easy to install and operate, Wall or ceiling mountable
- Energy saving, long lifespan
- Instant start, NO flickering, NO humming



3000K



4000K



5000K

Applications

Retail, Commercial,
Residential: Kitchens,
Bathrooms, Utility Rooms,
Closets, Garages, etc.



iGLO LED Double Ring Flush Mount - 11in, 18W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



Product Operation

There is dip switch on the inside of the fixture, and regularly marks 3000K/4000K/5000K, the dip switch is also called CCT select-able.

PRODUCT SPECIFICATIONS


Wattage	18W
Equiv. Power of CLF	65W
Color temperature	3000K/4000K/5000K CCT Tunable
Voltage	120V / 50/60HZ
Lumen	1260LM
Light efficiency	70 LM/W
CRI	>80
Beam angle	> 120°
Power factor	>0.9
Lifespan	30000 h
Housing	Metallic iron
Lens	Frosted PC cover
Without Mercury	Yes
Dimmable	No
Certification	ETL ES

iGLO LED Double Ring Flush Mount - 14IN, 26W


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET


New Construction Or Remodel Installation

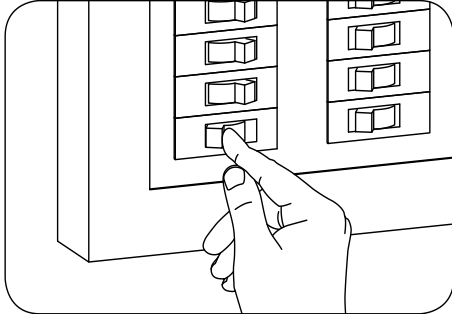


- ❶ For safety, turn off the main power before installation.

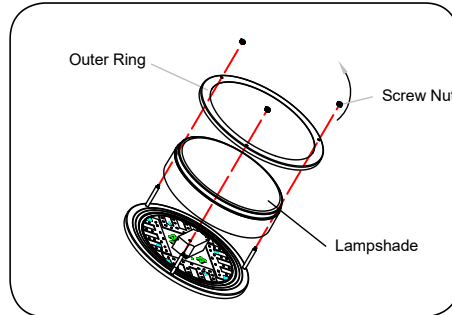


- ❷ Follow the direction shown, unscrew the lampshade counterclockwise by hand.

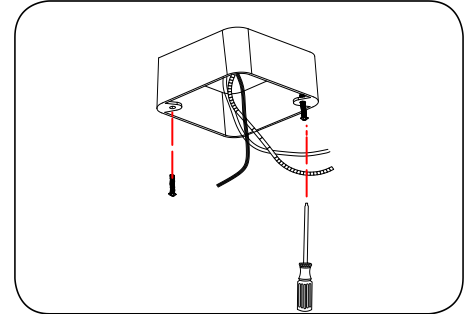


- ❸ Drive two screws into the junction box, but not completely to the end of the junction box, with 2/3 inside and 1/3 outside.

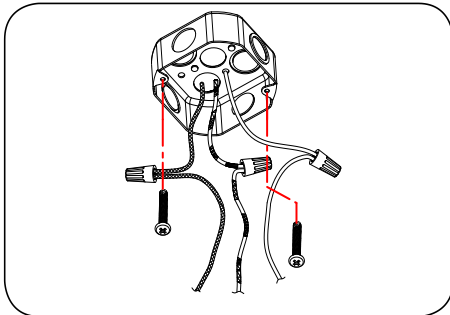


- ❹ Connect the wires of the ceiling light to the wires on junction box, L-L, N-N, GND-GND.

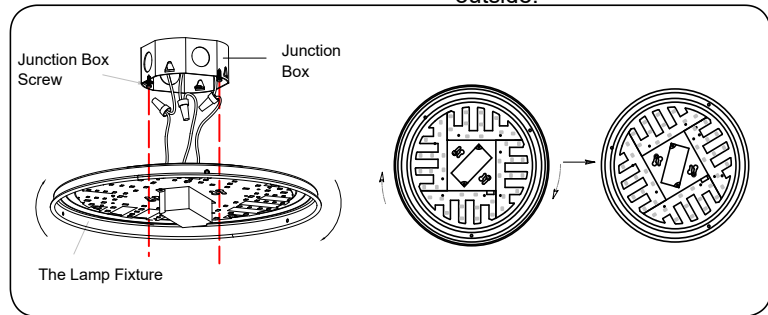

- ❺ After wiring, push the fixture up over the screws on junction box and turn it counterclockwise, so the screws slide along the slots which holds the fixture in place. Fasten the screws.

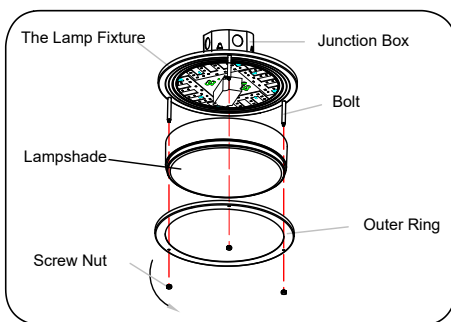

- ❻ Screw the lampshade to the fixture clockside by hand.

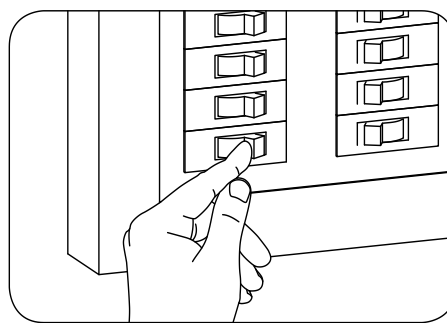

- Restore main power.