

iGLO LED Striped Canopy Series - 150W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET



Features

- UL, DLC Certificate
- PHILIPS Chip, high CRI
- Mean Well IP65 driver
- Input Voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury


Applications

Gas Stations, Service Stations,
Underground Parking Lot, Warehouse,
Garage, Work Floor & Factories, etc.

Diffuser 01



Diffuser 02

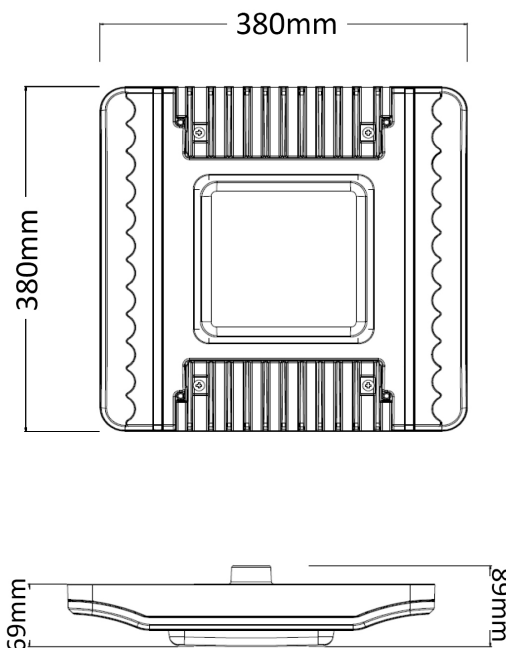



PRODUCT SPECIFICATIONS

iGLO LED Canopy Series:	GL150WCANPYSTR01SN4000KUDX GL150WCANPYSTR01SN4500KUDX GL150WCANPYSTR01SN5000KUDX GL150WCANPYSTR01SN5700KUDX GL150WCANPYSTR02SN4000KUDX GL150WCANPYSTR02SN4500KUDX GL150WCANPYSTR02SN5000KUDX GL150WCANPYSTR02SN5700KUDX
Diffuser Type:	01 or 02
Wattage:	150W
Lumens:	15000-16500 LM
CCT:	4000K/4500K/5000K/5700K
Input Voltage:	AC100-277V, 50-60 Hz
Power Factor:	>0.9
Efficacy:	104.82 lm/w
CRI:	>80
Dimension:	380*380*72mm
Viewing Angle:	100°
Operating Temperature:	-20°C to 45°C
Application:	Outdoor
Housing:	Aluminum
Waterproof Rating:	IP65
Certification:	UL, DLC
Warranty:	5 years

Box Size	Qty/Carton	Gross Weight	Net Weight
425*420*120mm	1	7.3 kg/CTN	6.3 kg/PCS

PRODUCT SPECIFICATIONS

Diffuser Type 01

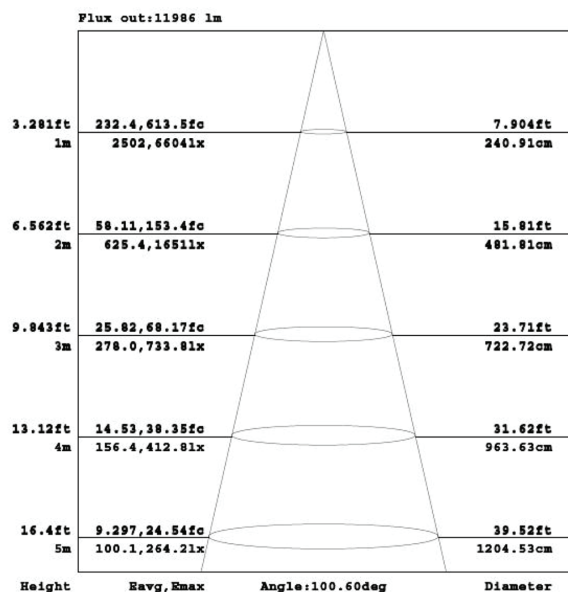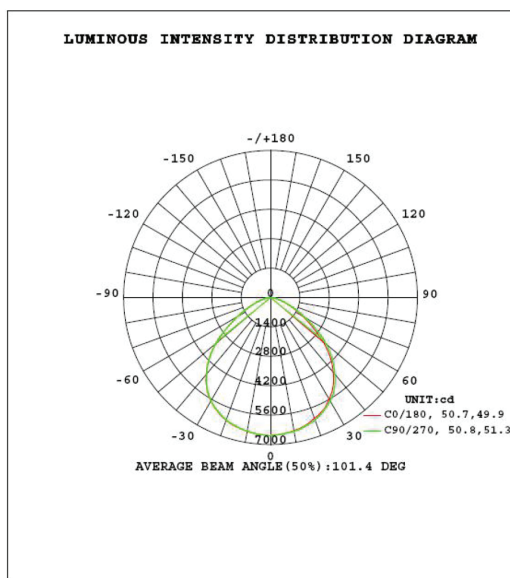

Diffuser Type 02

