

# iGLO LED Double Ring Flush Mount - 14IN, 26W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

**iGLOLED**  
IGLOLED.NET



## Features

- Kelvin Changing
- ETL, cULus, RoHS certificates
- Input voltage 120VAC
- Finish Steel Double Rings
- No UV or IR in the beam
- Easy to install and operate, Wall or ceiling mountable
- Energy saving, long lifespan
- Instant start, NO flickering, NO humming



3000K



4000K



5000K

## Applications

Retail, Commercial,  
Residential: Kitchens,  
Bathrooms, Utility Rooms,  
Closets, Garages, etc.



# iGLO LED Double Ring Flush Mount - 14IN, 26W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



## Product Operation

There is dip switch on the inside of the fixture, and regularly marks 3000K/4000K/5000K, the dip switch is also called CCT select-able.

## PRODUCT SPECIFICATIONS


|                     |                                  |
|---------------------|----------------------------------|
| Wattage             | 26W                              |
| Equiv. Power of CLF | 90W                              |
| Color temperature   | 3000K/4000K/5000K<br>CCT Tunable |
| Voltage             | 120V / 50/60HZ                   |
| Lumen               | 1820LM                           |
| Light efficiency    | 70 LM/W                          |
| CRI                 | >80                              |
| Beam angle          | > 120°                           |
| Power factor        | >0.9                             |
| Lifespan            | 30000 h                          |
| Housing             | Metallic iron                    |
| Lens                | Frosted PC cover                 |
| Without Mercury     | Yes                              |
| Dimmable            | No                               |
| Certification       | ETL ES                           |

# iGLO LED Double Ring Flush Mount - 14IN, 26W


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

**iGLOLED**  
IGLOLED.NET


## New Construction Or Remodel Installation

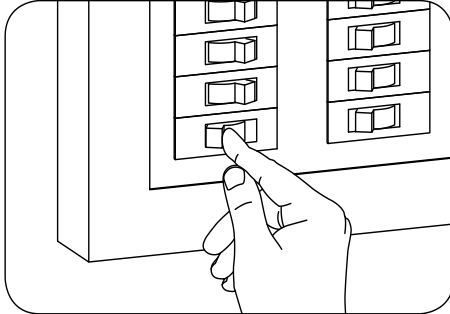


- ❶ For safety, turn off the main power before installation.

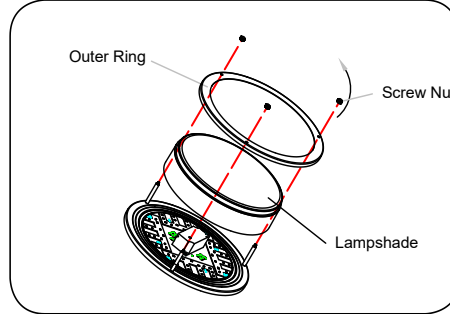


- ❷ Follow the direction shown, unscrew the lampshade counterclockwise by hand.

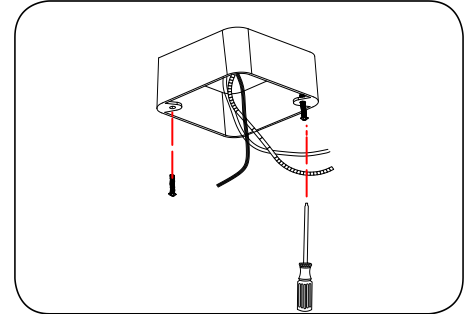


- ❸ Drive two screws into the junction box, but not completely to the end of the junction box, with 2/3 inside and 1/3 outside.

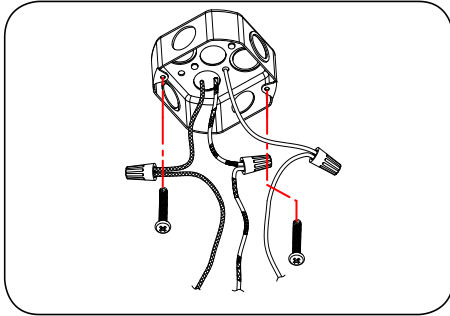


- ❹ Connect the wires of the ceiling light to the wires on junction box, L-L, N-N, GND-GND.

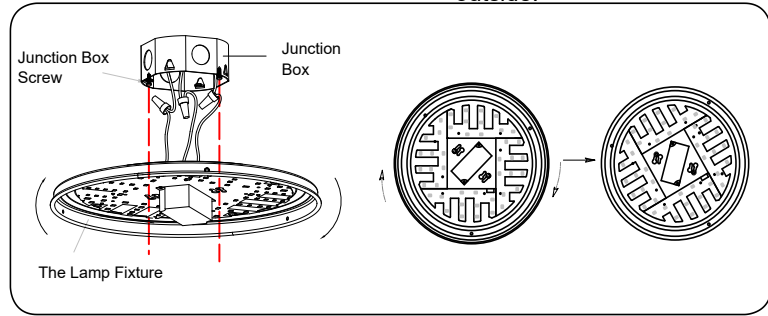

- ❺ After wiring, push the fixture up over the screws on junction box and turn it counterclockwise, so the screws slide along the slots which holds the fixture in place. Fasten the screws.

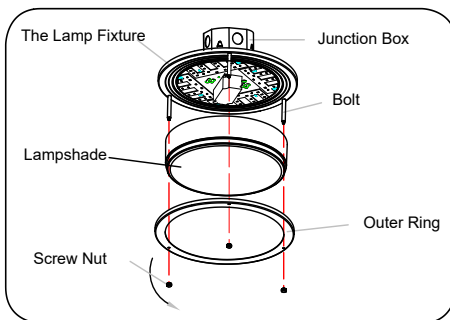

- ❻ Screw the lampshade to the fixture clockside by hand.

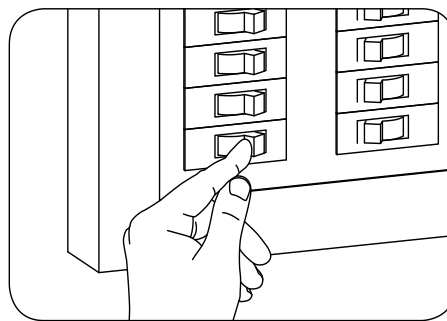

- Restore main power.