

SMART LED DOWNLIGHT- 6IN 13W

iGLOLED

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



Compatible with Smart Home Technology



16 Million
Colors



Bluetooth
& WiFi



Cool &
Warm White



Group
Control



Timer &
Schedule



Remote &
APP Control



Voice
Control



Share
Access



FEATURES

- Color temperature: 5000K- 2700K + RGB
- Easy to install
- Optical Lens / Anti-Aging / Durable
- High Thermal Conductivity Aluminum
- Great Heat Dissipation
- Vacuum Sealed / Dust-Free / Anti-Corrosion
- Suitable for Dry Location, Damp Location (Waterproof Technology)
- Lifespan Up to 30,000 Hrs

APPLICATIONS

Hotels, Meeting Rooms, Offices, Factories, Schools, Universities, Malls, Supermarket, Retail, Residential and much more.

SMART LED DOWNLIGHT- 6IN 13W


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED

SPECIFICATIONS

Wattage	13W
Equiv. Power of CFL	90W
Voltage	100-277V 50/60HZ
Color temperature	5000K (white light) - 2700K (warm light) + RGB
Lumen	850-910 LM
Light Efficacy	60-70 LM/W
Dimmable	Yes
Power factor	>0.7
CRI	>90
Beam angle	100°
Power Source/ Light Control	Power Supply, Bluetooth/ APP Control + Switch control
Start Time	< 1 s
Housing	Aluminum + PC
Lens	Frosted
Lifetime	30000 Hrs
Certificates and standards	ETL FCC Energy Starr
Warranty	3 years

Cool White , Warm White and Multi-Color

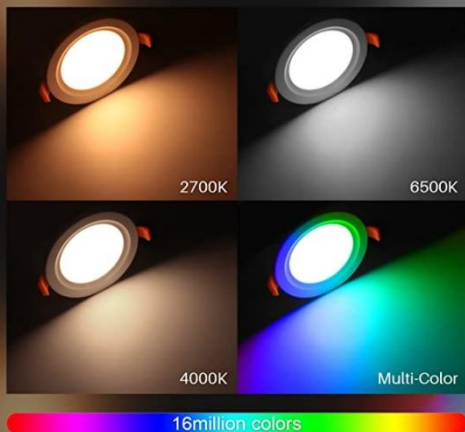

Voice Control

by Google Assistant and Amazon Alexa



Music Mode

Color changes with music & rhythm





SMART LED DOWNLIGHT- 6IN 13W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED

Dimension & Installation

The set include punch template card, more precise

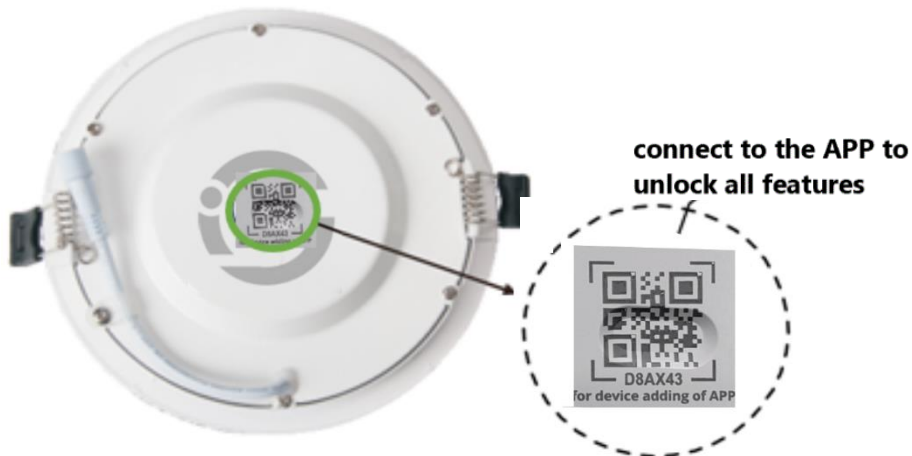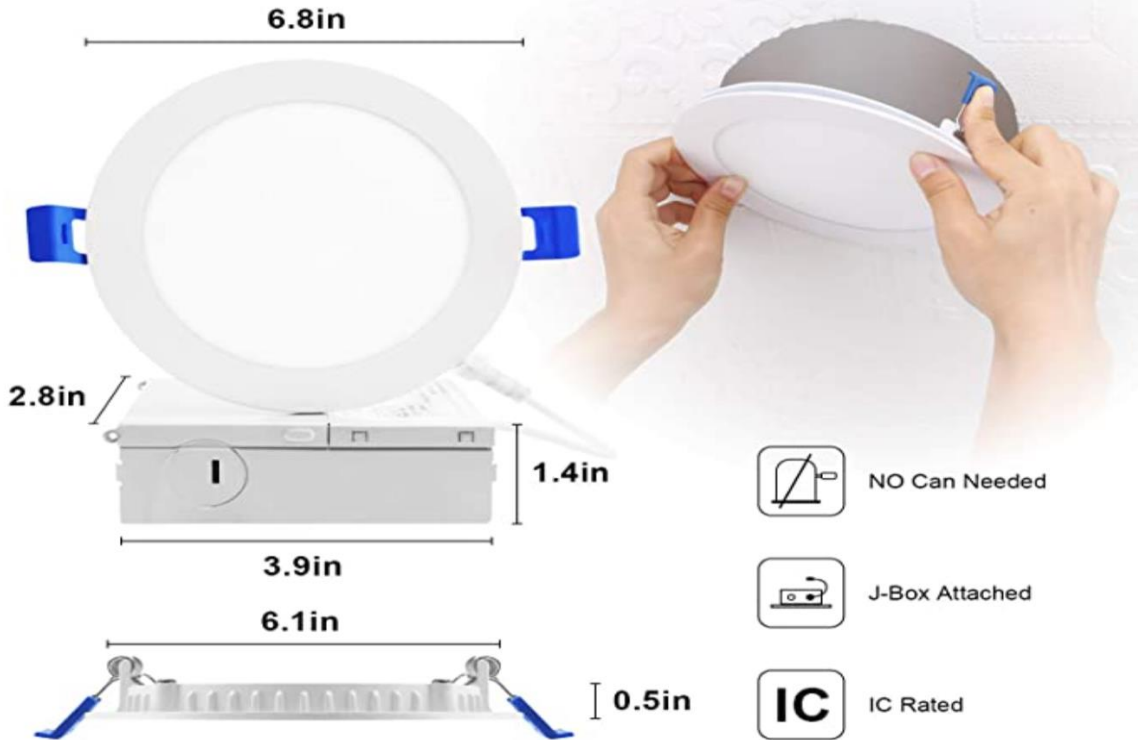

Disclaimer

This product data sheet provides periodic information, and the content can be updated at any time according to the actual situation of the product without notice. If caused by improper use of this product data sheet The company does not assume any responsibility for direct or indirect losses

SMART LED DOWNLIGHT- 6IN 13W

iGLOLED

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

INSTALLATION

STEP1:

Turn off the power before installation. Remove the existing bulb and if necessary remove the existing trim. open the hole on the mounting surface according to the size of fixture.

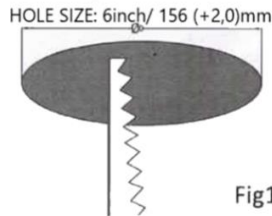


Fig1

STEP3:

Connect the fixture with power cable after fixed the junction box, as shown in Fig 3

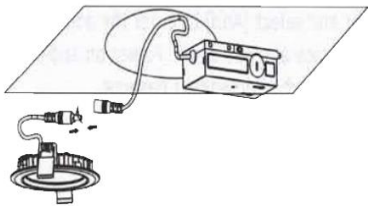


Fig3

STEP5:

Turn on the power after installation, check the fixture can work well, as shown in Fig5.

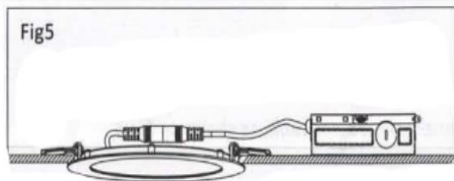


Fig5

STEP2:

Open the junction box, connect the power cable, as shown in Fig 2

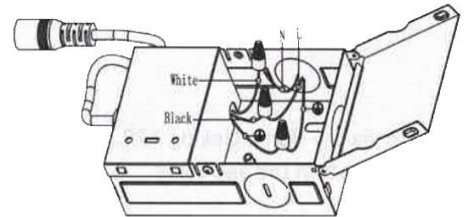


Fig2

STEP4:

Install the fixture to ceiling surface, as shown in Fig4

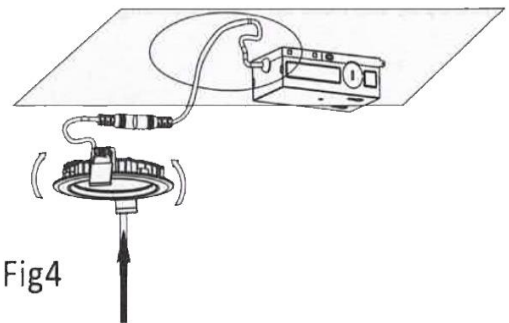


Fig4

Download app

This product can be intelligently controlled via the Home Linking APP, scanning QR codes or downloading mobile clients in the app store.



Google Play



APP Store

Add device

1. Open the app, log in or register for an account to enter the home page;
2. Click [+] in the upper right corner and select [Add] to enter the adding process.
3. If adding failed, please reset the device and add again. Power on and off 5 times continuously. Reset will be successful when downlight flashing.