

iGLO LED Integrated Tube Series - 60W, 8ft

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET



RoHS


Features

- ETL, FCC, CE, RoHS, cULus certificates.
- 8ft, Integrated, T8 Tube.
- Al. + PC tube, Clear.
- 120° lighting, high CRI.
- Lifespan: 50,000 hours.
- Internal driver, input voltage 100-277VAC.
- Easy Installation.



Applications

Hotels, Bars, Shopping Malls, Corridors,
Restrooms, Museums, Exhibition Hall,
Warehouse, Home Interior Lighting and
etc.

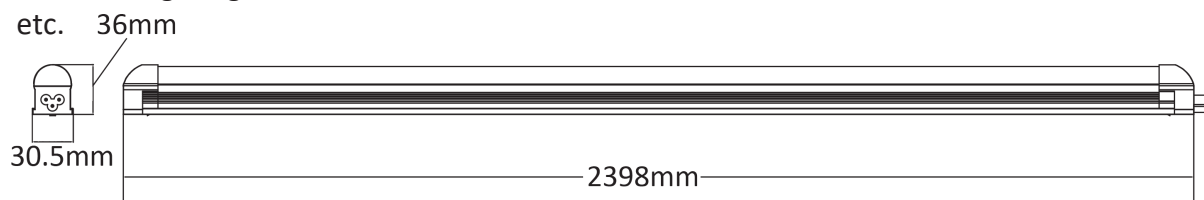

PRODUCT SPECIFICATIONS

iGLO LED T8 Integrated Tube Series:	GL60WINT8ZNH3000KUDX2.4MC GL60WINT8ZNH4100KUDX2.4MC GL60WINT8ZNH5000KUDX2.4MC GL60WINT8ZNH6500KUDX2.4MC
Wattage:	60W
Lumens:	7000 lm
CCT:	3000K/4100K/5000K/6500K
Input Voltage:	AC100-277V, 50/60Hz
Power Factor:	≥0.90
Efficacy:	120 lm/W
CRI:	>80
THD:	≤23%
Dimmable:	No
Dimensions:	8ft
Projected Hours (Life Span):	>50,000 Hours
Beam Angle:	120°
Operating Temperature:	-20°C to 40°C
Housing:	Aluminum+PC
Cover/Lens Type:	Clear
Waterproof Rating:	IP20
Certificates:	ETL, FCC, CE, RoHS, cULus
Warranty:	5 Years



Box Size	Qty/Carton	Net Weight	Gross Weight
2440*230*160 mm	20 pcs	0.7 kg/PCS	14.3 kg/CTN

iGLO LED Integrated Tube Series - 60W, 8ft

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



WIRING DIAGRAMS

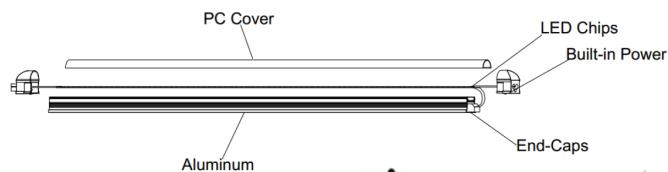

Electric Shock Attention


Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION


STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY




STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

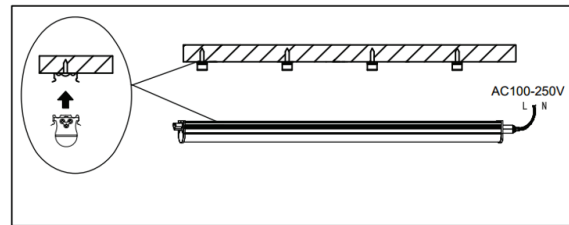

STEP3. CONNECT THE POWER CORD TO THE TUBE

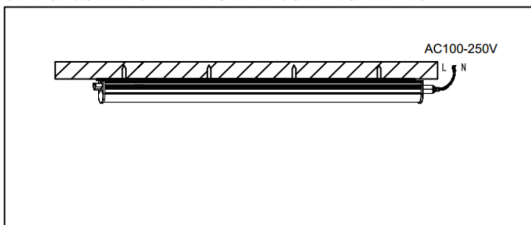

STEP4. CONNECT BY LINKABLE CONNECTOR

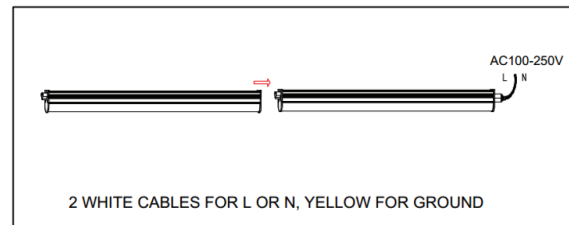

CAUTION: THE INTEGRATED TUBES CANNOT BE CONNECTED WITH MORE THAN 4 PCS



WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST BE OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF TUBE IS IN SATISFACTORY CONDITION, SUCH AS WHETHER IT LOOKS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE INSTALL UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR USE OR SOMEWHERE IT MAY BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.