


iGLO LED Vapor fixture - 8FT, 80W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET

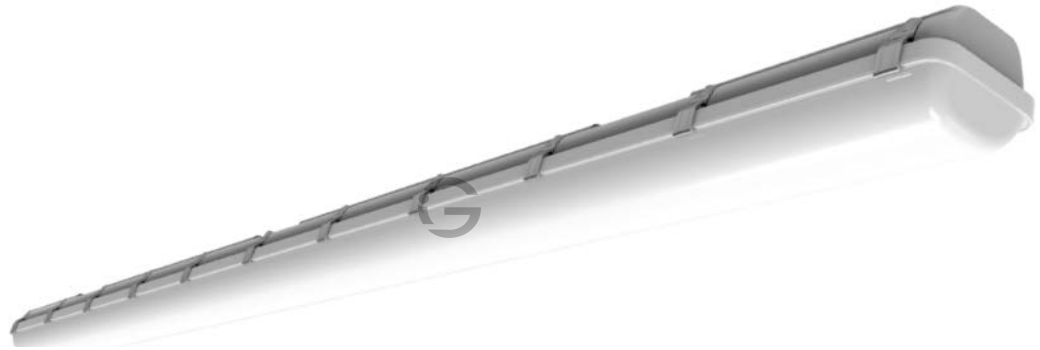

Features

- cULus, cETLus & DLC certificates.
- Durable body and lens.
- 0-10V dimming optional.
- Microwave Motion Sensor for Bi-Level control.
- 90 mins Emergency Battery Backup optional.
- Universal Voltage 100-277VAC.
- Easy Installation.



The mounting brackets keep adjustable space for easy correction .



MICRO-WAVE & EMERGENCY AVAILABLE.
Suitable for various kinds of applications.



The Light Transmittance of PC cover is upto 92%.
The integrated design of Lens Cover and LED Plate is more convenient to install and use.

Applications

Supermarkets, Farms, Parking Lots, Warehouses etc.



The fixed clips are elegant, secure and easy to use.

iGLO LED
1-866-999-IGLO
Info@iGLOLED.net


4924 Cambridge Rd.
Ft. Worth, TX 76155
www.iGLOLED.net

PRODUCT SPECIFICATIONS

iGLO LED TRI-PROOF LIGHT:	WL-VL8280XXXXXK-XX-X
Wattage:	80W
Lumens:	10400 lm & 12000 lm
Lumen Efficacy:	130 lm/W (Frost Cover) 150 lm/W (Clear Cover)
CCT:	5000K
Input Voltage:	100-277VAC & 120-134VAC
PFC:	>0.9
CRI:	>80
THD:	>20%
Dimming Capacity:	0-10V dimming
Photo Sensor:	No Option
Emergency Backup:	No Option
Dimensions:	8ft, 2400x125x92mm
Operating Temperature:	-40°C to +50°C
Beam Angle:	120°
Cover:	Frost Cover/Clear Cover/Clear-line
Mountings:	Surface Mount, Suspend Mount
Waterproof Rating:	WET (IP66)
Life Time:	50000 hrs
Certificates:	cULus, cETLus, DLC
Warranty:	5 Years


Carton Size	Qty/Carton	Gross Weight	Net Weight
245 *28.5 *22 cm	4	24 kg/CTN	22 kg/PCS

Dimension

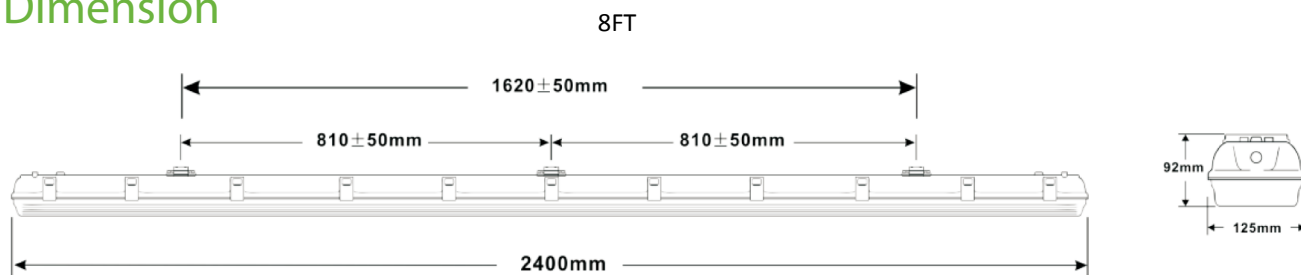


Photometric


Cone illuminance Diagram:

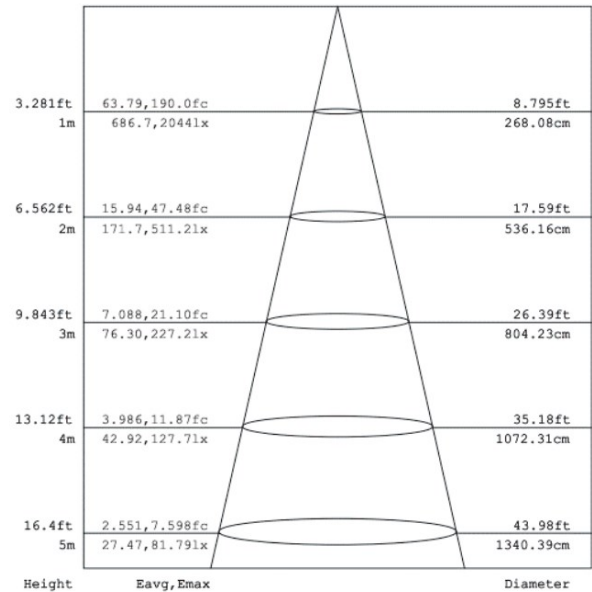


Luminous Intensity Distribution Diagram:

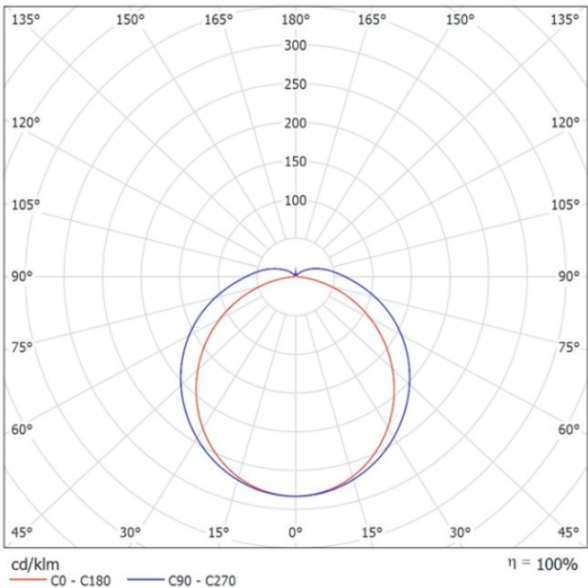

Installation

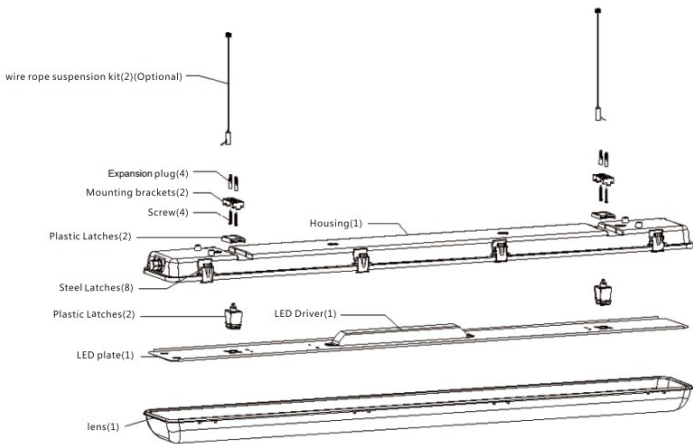

Surface Mount

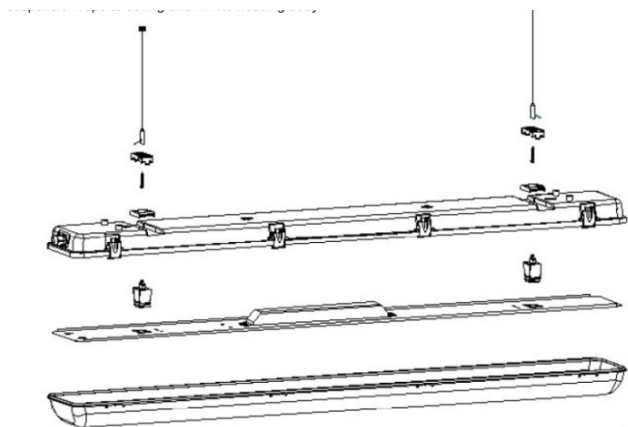

Suspend Mount

iGLO LED Vapor fixture - 8FT, 80W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



OPTIONS

Motion Sensor



Emergency Driver (4W &8W) 90mins



Frost Cover/Clear Cover/Clear-line

