

iGLO LED Emergency Exit Signs (With Heads)


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET



Features

- Charge rate/power "ON" LED indicator light and push-to-test. switch for mandated code compliance testing.
- Input voltage 100-277VAC
- 90-minute emergency illumination.
- Fully automatic solid-state, two rate charge initiates battery charging to recharge a discharged battery in 24 hours.
- Energy saving, long lifespan, Replaces 13W, 18W, and 26W
- Remote capacity option available

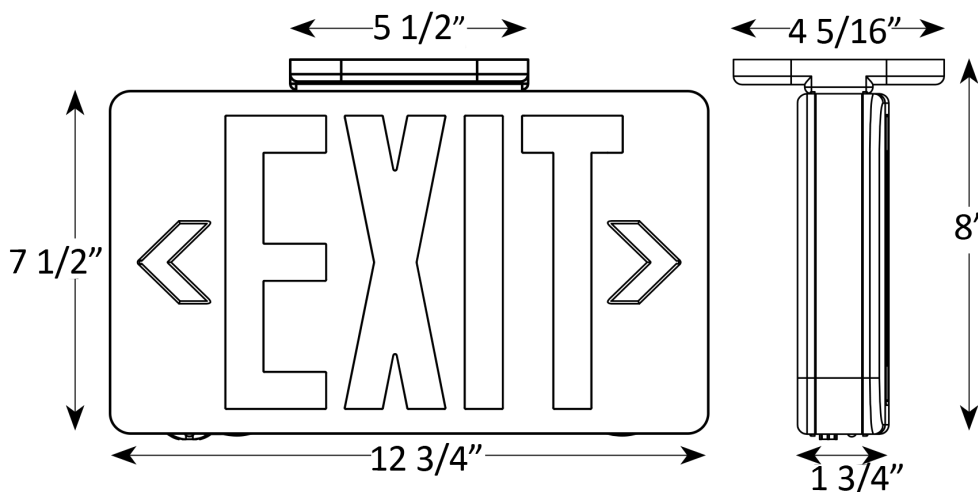

iGLO LED Emergency Exit Signs (With Heads)

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

iGLO LED Emergency Exit Sign Series:	GLEXITTWINHDN0X
Input Voltage:	Duel 120/277 Voltage
Charging Time:	< 24 Hours
Emergency Operation:	≥ 90 minutes
Dimensions:	7.5"x12.75"x1.75"
Battery:	Built-in Backup Battery
Housing:	Injection-molded, engineering grade.5VA flame retardant, high-impact resistant,thermoplastic in white or black finish. EZ snap-out chevron directional indicators.
Mounting:	EZ-snap mounting canopy included for top or end mount. Universal K/O pattern on back plate for wall mount.