

iGLO LED MINI WALL PACK SERIES 9W (with a photocell)

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT




Features

- High brightness, 120 LPW.
- Architectural bronze finish, anti-corrosion spray.
- Durable UV-stabilized PC lens resist corrosion and environmental conditions.
- IP65 rated, waterproofing material is used throughout the fixture.
- Default with Photocell.
- Easy installation and operation.
- 50W-75W HID lamps.
- CCT 3000K, 4000K, 5000K
- 5 years warranty.

Application

- Site
- Pathway
- Security building entrances and more.

DIMENSIONS

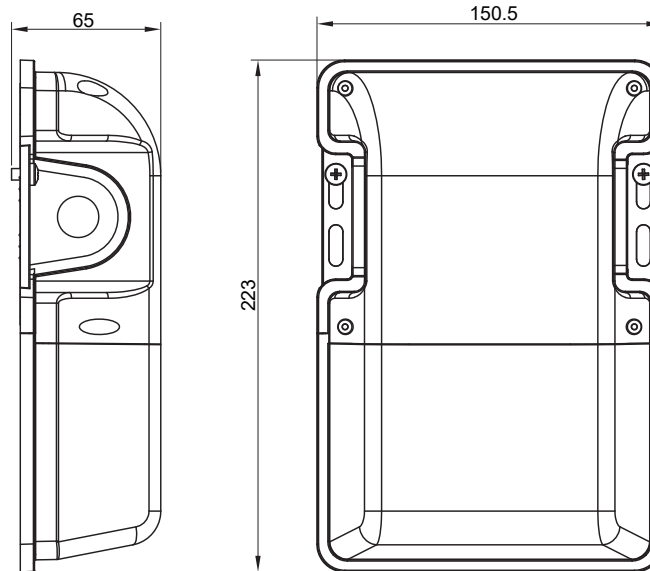

PRODUCT SPECIFICATIONS

iGLO LED MINI WALL PACK 9W	GL9WWPSN3000KUDX GL9WWPSN4000KUDX GL9WWPSN5000KUDX
Power	9W
Input Voltage	120-277VAC
Efficacy	120LPW
Lumen	1080LM
CCT	3000K/4000K/5000K
Chips	Lumiled2835
PF	>0.9
CRI	>80
Working Temp	-40°C~+40°C -40°F~+104°F
Replaces	50W-75W