


iGLO LED Emergency Backup Series - 25W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

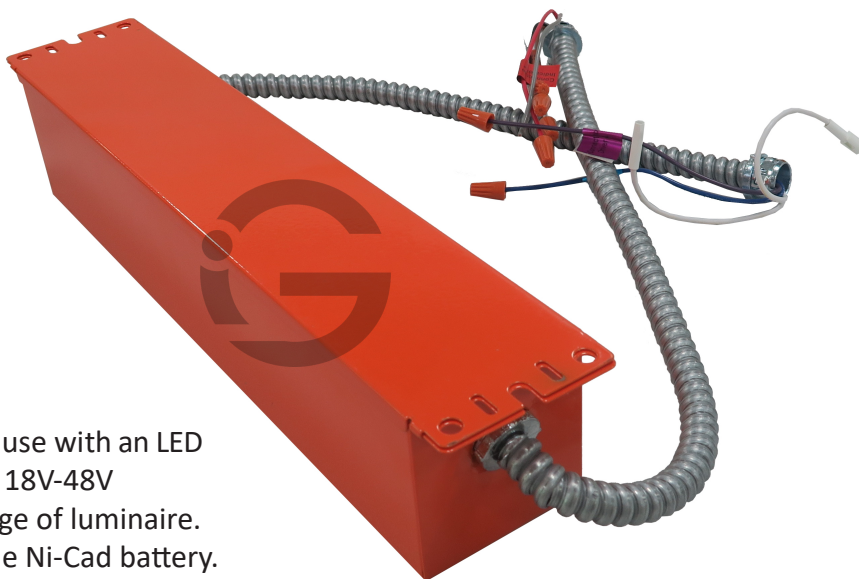


Features

- The GL25WEMBACKUPOKN0X is for use with an LED load up to 25W at a rated voltage of 18V-48V
- Dial the code to suitable rated voltage of luminaire.
- Long life high temperature recyclable Ni-Cad battery.
- Includes test switch and charge indicator accessory kit.
- For use with switched or unswitched fixtures
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting

Applications

The LED Emergency Equipment from LIGHTING is ETL listed and UL component recognized that allows the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the LED Emergency Equipment switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single can and is available in different mounting configurations for individual fixture requirements.

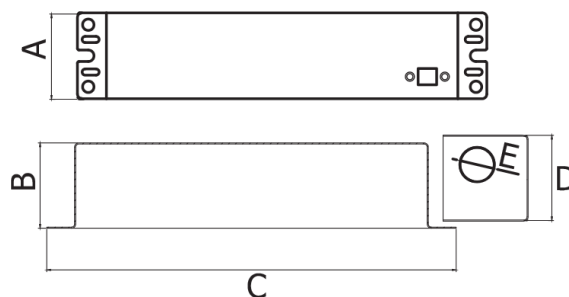

Model	GL25WEMBACKUPOKN0X
A	69 mm
B	71 mm
C	377 mm
D	69 mm
E	22.2 mm

PRODUCT SPECIFICATIONS

iGLO LED Emergency Backup Series:	GL25WEMBACKUPOKN0X
Wattage:	25W
Input Voltage:	100-277VAC, 50/60 Hz
Input Current:	80mA max
Output Voltage:	170V DC, 0.147A 25W
Maximum Connected Load:	1.04A
Emergency Operation:	≥ 90 minutes
Operating Temperature:	0°C to 50°C
Charging Current:	≤250mA
Dimensions:	377*69*69mm
Battery:	14.4V-4500mA, High Temp Nickel-Cadmium 48 hour recharge 7-10 year life expectancy
UL conditions of Acceptability:	Must be factory wired battery temperature must not exceed 50°C