



CE RoHS

Features

- CE, RoHS certificates
- Input voltage 85-265VAC
- No UV or IR in the beam
- Excellent Heat Dissipation. High quality aluminum die casting, with high grade thermal conductive silicone.
- Energy saving, long lifespan
- High Brightness Diffuser.
- Waterproof and low temperature resistant.
- Green and eco-friendly without mercury.

Applications

Advertising and Signage lighting; Libraries, Squares, Parks & Gardens; Supermarkets & Apartments lighting and etc.

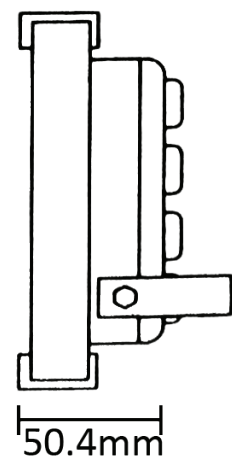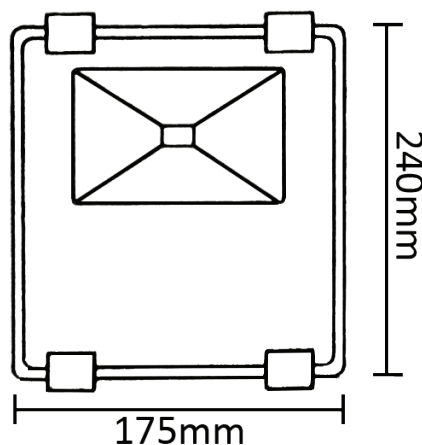

iGLO LED Slim Floodlight Series - 50W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

iGlo LED Slim Floodlight Series:	GL50WSLIMFL6500KN0X
Wattage:	50W
CCT:	6500K
Power Factor:	0.9
Input Voltage:	85-265VAC
Lens Type:	Tempered Glass
Dimensions:	240*175*50.4mm
Projected Hours:	50,000 Hrs
Viewing Angle:	120°
Housing:	Aluminum die casting, with thermal grade silicone, and electrostatic sprayed high temperature surface coating
Housing Color:	Black
Waterproof Rating:	IP65
Certificates:	CE, RoHS
Warranty:	2 Years