

iGLO LED Wattage & Kelvin Changing- 2x2 Backlit Panel

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.COM



CE


RoHS

FCC




Features

- cETLus, CE, RoHS, DLC and FCC Certificates.
- Input Voltage 100-277VAC, High CRI.
- Designed for 50,000 hours life time with 5 year warranty and Dimmable.
- Instant Startup, Soft light, No glare, No noise, No strobe
- Uniform light, Easy installation.

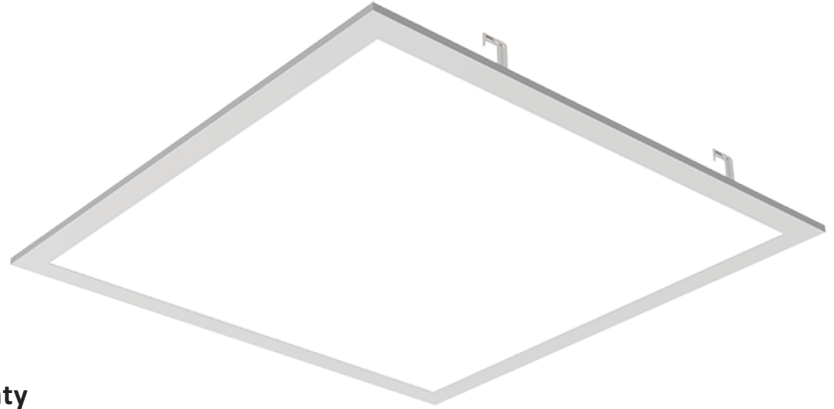

Applications

Widely used in Offices, Schools,
Hospitals, Hotels, Shopping Centers, etc.

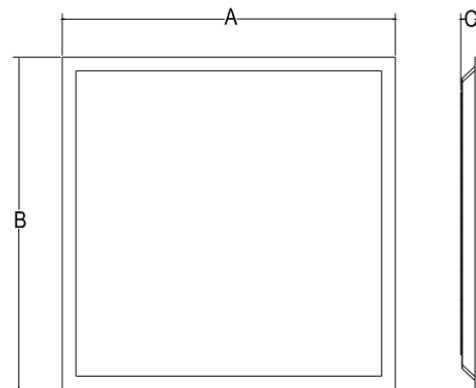

Maximum overall	A	B	C
2'2ft	603mm	603mm	30mm

iGLO LED Wattage & Kelvin Changing- 2x2 Backlit Panel

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

DLC Listing: ZS-BL2*2-S40-CCDD

iGLO LED Back-Lit Panel Series:	Order Code: 632726213510
Wattage:	20W- 30W- 40W
Lumens:	5000 lm
CCT:	3000K / 4000K / 5000K
Input Voltage:	100-277VAC 50/60 Hz
Power Factor:	>0.95
Efficacy:	125 lm/W
CRI:	>80
THD:	<10%
Dimmable:	Yes (0 -10V dimming)
Dimensions:	2x2 , 603*603*30mm
Lifespan:	>50,000 Hrs
Beam Angle:	120°
Operatng Temperature:	-20°C to 45°C
Waterproof Ratng:	IP40
Certificates:	cETLus, CE, RoHS, FCC ,DLC
Warranty:	5 years


Box Size	Qty/Carton	Gross Weight
650*250*650mm	6	15 kg/CTN

iGLO LED Wattage & Kelvin Changing- 2x2 Backlit Panel


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



WIRING DIAGRAMS

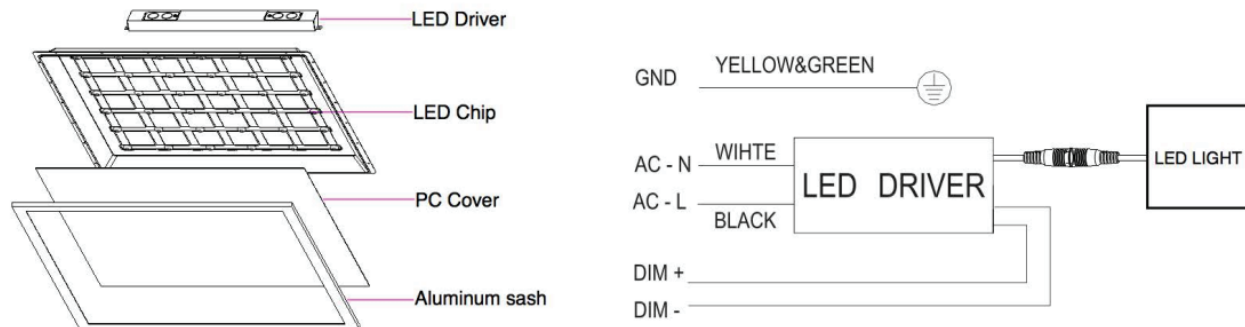

INSTALLATION INSTRUCTION

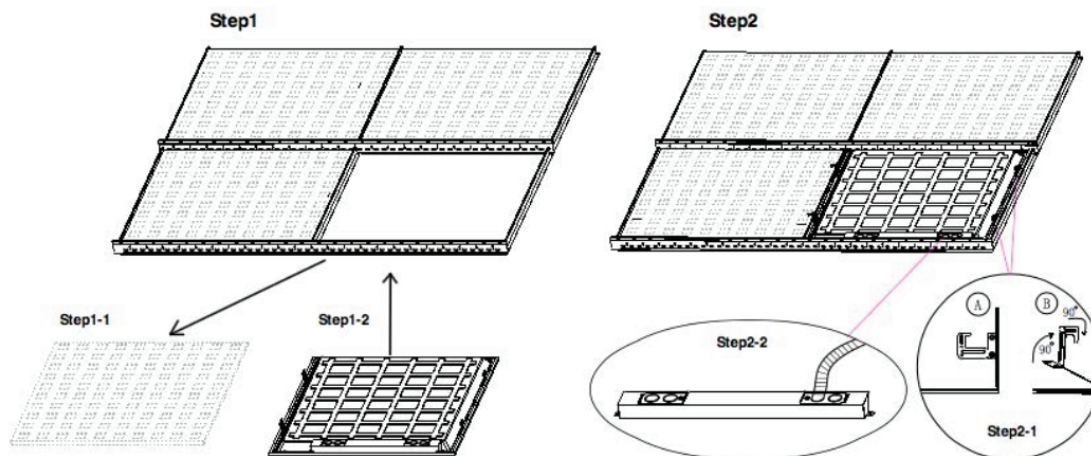

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.

Step 2: Lift the 4 buckles on the back of the panel up by 90° then bend the top part of the buckles 90° towards the direction where you can anchor the light fixture to the T-bar.

Step 3: Place the driver on top of the lighting fixture in the back. Connect the cable between the driver and the lighting fixture. Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white)

Warning:

1. Please read the instructions carefully before installation.
2. Please make sure the power is off before installation.
3. The installation can only be done by certified electricians.
4. Product rated voltage is 100-277 Volts. Please make sure voltage range meets the requirements
5. please don't use chemicals to clean the lighting surface.